


BISTAR

TP6H72M
TP6H72M(H) **144 half-cell**

390 - 410W

half-cut mono perc

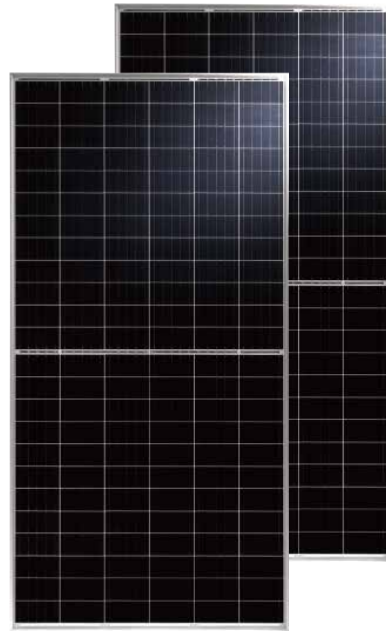

KEY FEATURES



Half-cut cell technology

New circuit design, lower internal current, lower Rs loss



Significantly lower the risk of hot spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



IP68 junction box

High waterproof level

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY



Linear Performance Warranty

Standard Performance Warranty

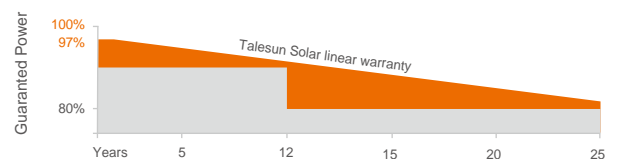

[Redacted text area]

[Redacted text area]

[Redacted text area]

[Redacted text area]

[Redacted text area]

[Redacted text area]

[Redacted text area]

[Redacted text area]

TP6H72MM/405W

