



# BISTAR

TP6L60M  
TP6L60M(H) **120-cell**

**360 - 380W**

9BB Half-cut Mono Perc

## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




## PERFORMANCE WARRANTY

**12** Years  
Quality Assurance

**2** Years  
Power Output Guarantee

Linear Performance Warranty

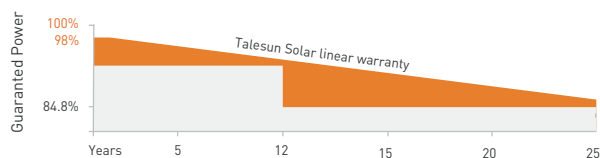

## KEY FEATURES



### 9BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss  
Ga doped wafer, attenuation <2% (1st year) / ≤0.55% (Linear)



### Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



### Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



### Wider Application

No water-permeability and high wear-resistance,  
can be widely used in high-humid, windy and dusty area



### IP68 Junction Box

High waterproof level

[www.talesun.com](http://www.talesun.com)

[marketing.hq@talesun.com](mailto:marketing.hq@talesun.com)

\* GL-EN-Version 2023.09.25

Testing Condition

STC: Irradiance 1000W/m<sup>2</sup>, Spectra at AM1.5, Module Temperature 25℃. Power output tolerance: 0~+5W Power output tolerance: 0~+5W Power output tolera