

### 体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



### 质量保证

12

25

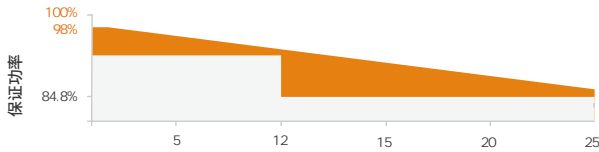

### 产品特性



10BB半片电池技术

2%

0.55%



显著降低热斑风险



更低度电成本

2%



优秀的抗PID性能

85% / 85% RH 192h



IP68接线盒



|  |       |       |       |       |       |
|--|-------|-------|-------|-------|-------|
|  |       |       |       |       |       |
|  |       |       |       |       |       |
|  |       |       |       |       |       |
|  |       |       |       |       |       |
|  |       |       |       |       |       |
|  |       |       |       |       |       |
|  | 20.20 | 20.50 | 20.70 | 21.00 | 21.30 |

|  |  |
|--|--|
|  | 10BB   |
|  | 108 (6*18)   |
|  | 1722*1134*30mm<br>(67.80*44.65*1.18 )                  |
|  | 21.5kg (47.4lbs.)                                      |
|  |  |
|  |  |
|  | IP68, 3  |
|  | 4mm <sup>2</sup> (IEC), 12AWG(UL)<br>350mm(+),250mm(-) |
|  | T01/LJQ-3-CSY/MC4/MC4-EVO2                             |